

# VariEco L

## Tubular drives for roller shutters and sun protection systems

Revoline L  
hardwired drives



### Type: VariEco L (230V/50 Hz)

**Application:** Roller shutter and textile sun protection  
**Limit switch:** Mechanical limit switches  
**Shaft size:** from  $\varnothing = 56$  mm inside  
**Features:** Plug-able cable

#### Possible limit switch modes

Upper limit switch	Lower limit switch
freely programmable	freely programmable

Item Number	Type/Item Description
36 921.0101	VariEco L40
36 931.0101	VariEco L60
36 941.0101	VariEco L80

#### Accessories included:


Connecting cable 2.0 m long, pluggable.

All drives are exclusive of: drive adapter, wall bracket (motor bearing) and switches.



Technical data and dimensions

Type	VariEco L40	VariEco L60	VariEco L80
Operating Voltage (V)	1 ~ 230		
Frequency (Hz)	50		
Max. torque (Nm)	40	60	80
Speed (rpm)	14		
Current (A)	1.2	1.9	2.0
Power (W)	280	430	470
Shaft Ø (mm)	56 inside		
Ingress protection (IP)	44		
Max. limit switch range in Revolutions of the shaft	35		
Operating mode (KB in min.)	4		
Length A (mm)	541.3	601.3	
Length B (mm)	524.3	584.3	
Weight (kg)	2.1	2.14	
Temperature range (°C)	-20 to +60		
Conformity	CE		

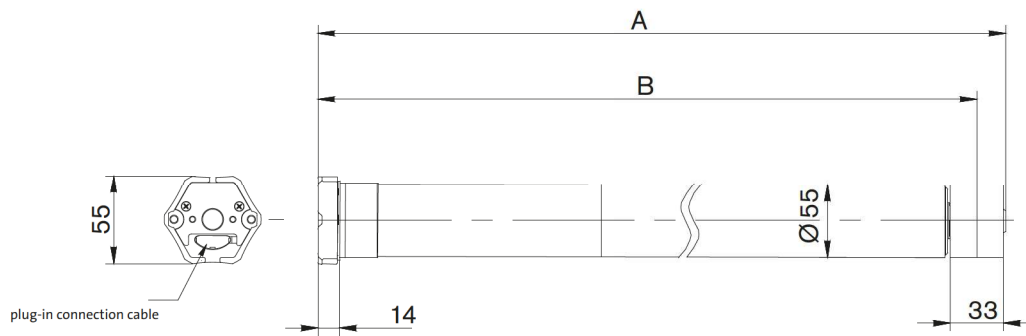

Accessories:



Cables  
Page 196



Drive adapter sets  
Page 174



Brackets  
from page 180



Radio control units  
from page 104



Radio receivers  
from page 122



Radio sensors  
from page 128



Wall mount controllers  
from page 140



Wired sensors  
from page 158

Radio tubular drives  
RevoLine L hardwired drives  
Venetian blind drives  
Speciality drives  
DC drive systems  
Radio control units  
Hardwired control units  
Accessories  
Door drives  
Door controls  
Door accessories  
Drive adapter profiles Lifting capacity tables