


JE50 FCM standard motor

enjoy motors®: mecánico - mechanic - meccanico - mécanique - mechaniker - mecânico

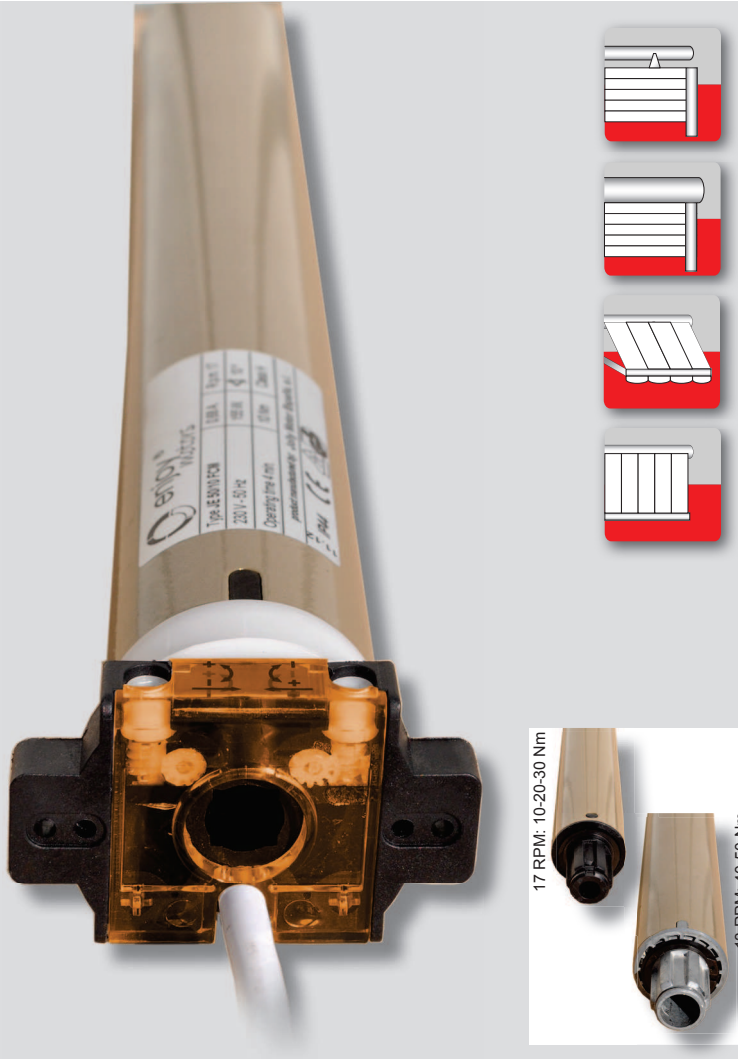

Español:

El motor JE50FCM está especialmente diseñado para ser instalado en persianas con cajón de aluminio o pvc, persianas enrollables tradicionales y toldos verticales, de punto recto, o con brazos articulados con tensión.

- Final de carrera mecánico, a través de tornillos.
- Eje mínimo de enrollamiento de 50 mm.
- 17 RPM: 10, 20 y 30 Nm.
- Cinco potencias: 10, 20, 30, 40 y 50 Nm.
- Reductora 40 y 50 Nm: realizada en aleación de Zinc.
- Tres medidas: 445 mm (10 Nm); 465 mm (20 Nm); 475 mm 30, 40 y 50 Nm).

English:

JE50FCM motor has been designed to be installed with roller shutters in aluminium or pvc window shutter box, traditional roller shutter system, vertical screen, straight awning and tensioned arms awning.

- Mechanical set up of the limit switch points, through screws.
- Suitable for pipes starting from Ø 50 mm.
- 17 RPM: 10, 20 and 30 Nm.
- Five torques: 10, 20, 30, 40 and 50 Nm.
- Gearbox 40 and 50 Nm: made of Zinc alloy.
- Three length: 445 mm (10 Nm); 465 mm (20 Nm); 475 mm (30, 40 and 50 Nm).



Características principales - Main characteristics - Caractéristiques principales - Caratteristiche principali - Schlüsseleigenschaften - Características principais

Product Code	JE50/10FCM	JE50/20FCM	JE50/30FCM	JE50/40FCM	JE50/50FCM
Torque (Nm)	10	20	30	40	50
Speed (Rpm)	17	17	17	13	13
Tube diameter motor (Ø mm)	45	45	45	45	45
Max. load in Ø 50 mm tube	27	47	72,5	95	110
Working time (Minutes)	4	4	4	4	4
Limit switch capacity (Turns)	27	27	27	27	27
Protection rating (IP)	IP44	IP44	IP44	IP44	IP44
Voltage ~ Frequency (V ~ Hz)	230 ~ 50	230 ~ 50	230 ~ 50	230 ~ 50	230 ~ 50
Absortion (A)	0,68	0,84	0,95	0,95	1,06
Consumption (W)	155	203	226	226	244
Cable length (M)	2,50	2,50	2,50	2,50	2,50
Motor weight (Kg)	2,30	2,40	2,45	2,45	2,60
Motor length (mm)	445	465	475	475	475
Package quantity (pcs)	10	10	10	10	10

Certification - Warranty

