


JE60 FCI standard motor

enjoy motors®: mecánico - mechanic - meccanico - mécanique - mechaniker - mecânico

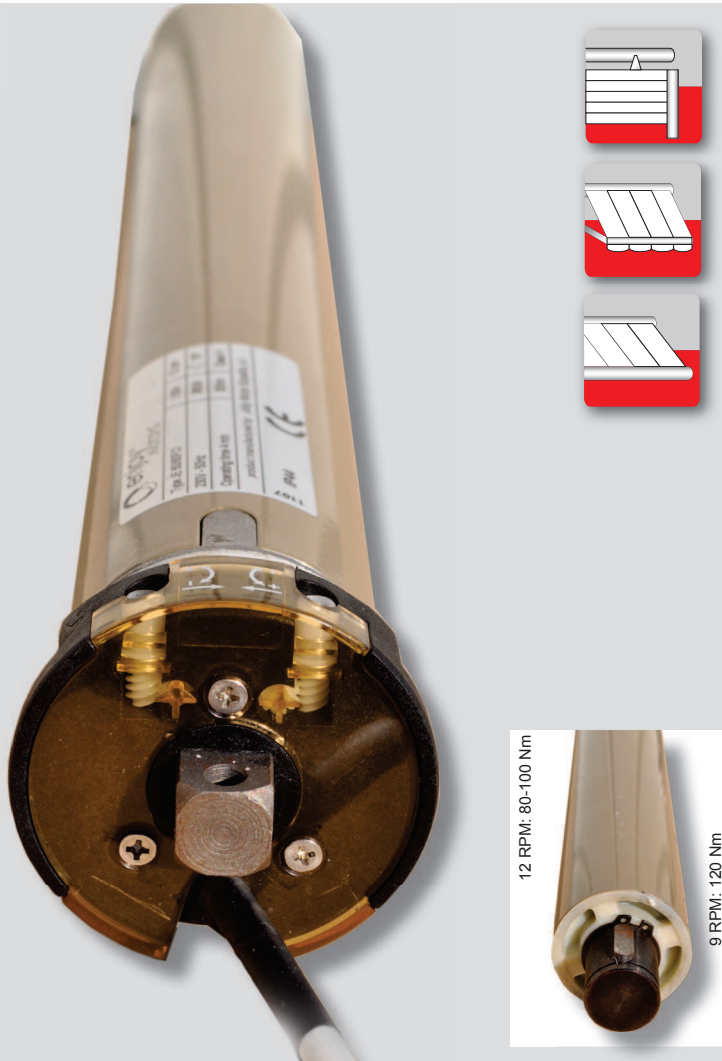

Español:

El motor JE60FCI está especialmente diseñado para ser instalado en persianas de aluminio extruido muy pesadas o en toldos de grandes dimensiones.

Cuenta con un perno metálico de 16 mm, alojado en la propia cabeza del motor, para darle mayor seguridad.

- Final de carrera mecánico, a través de tornillos
- Eje mínimo de enrollamiento de 70 mm.
- Tres potencias: 80, 100 y 120 Nm.
- Longitud total: 570 mm.

English:

The motor JE60FCI has been designed to be installed with roller shutters in extruded aluminium very heavy or extra-dimensioned awnings.

It has a metallic spigot in 16 mm, which is inserted in its own motor head for added security.

- Mechanical set up of the limit switch points, through screws.
- Suitable for pipes starting from Ø 70 mm.
- Three torques: 80, 100 and 120 Nm.
- Total length: 570 mm.



Características principales - Main characteristics - Caractéristiques principales - Caratteristiche principali - Schlüsseleigenschaften - Características principais

Product Code	JE60/80FCI	JE60/100FCI	JE60/120FCI
Torque (Nm)	80	100	120
Speed (Rpm)	12	12	9
Tube diameter motor (Ø mm)	59	59	59
Max. load in Ø 70 mm tube	137	171	205
Working time (Minutes)	4	4	4
Limit switch capacity (Turns)	27	27	27
Protection rating (IP)	IP44	IP44	IP44
Voltage ~ Frequency (V ~ Hz)	230 ~ 50	230 ~ 50	230 ~ 50
Absortion (A)	1,60	2,00	2,00
Consumption (W)	360	444	444
Cable length (M)	2,50	2,50	2,50
Motor weight (Kg)	4,80	4,80	4,80
Motor length (mm)	570	570	570
Package quantity (pcs)	6	6	6

Certification - Warranty

