


JE50 RAM-SHUTTER enjoy radio system eRS4

enjoy motors®: electrónico - electronic - elettronico - electronique - elektronisch - eletrônico

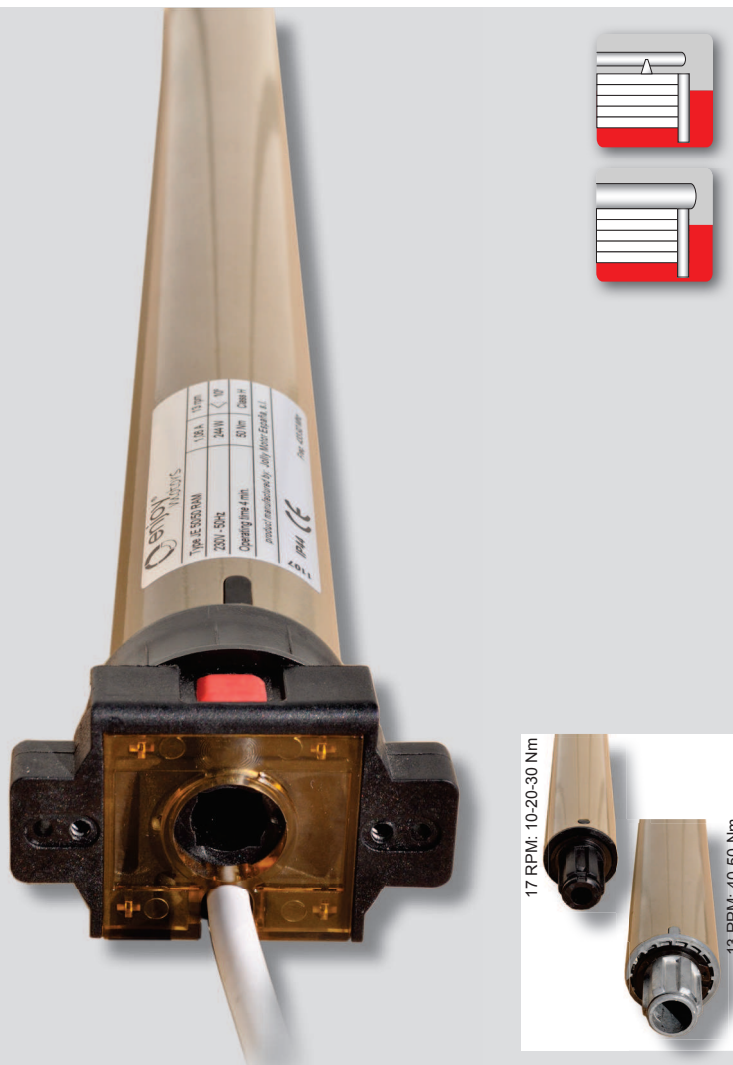

Español:

El motor radio JE50RAM-SHUTTER (eRS4) está especialmente diseñado para ser instalado en persianas con cajón de aluminio o pvc y persianas enrollables tradicionales.

Funciones específicas para persianas:

- Programación automática de los finales de carrera.
- Detección automática de obstáculos, durante la bajada.
- Detección automática a resistencias anómalas, durante la subida (por hielo o desplazamiento de las lamas).
- Bloqueo de la persiana cuando está cerrada (conjuntamente con tirantes rígidos), incrementando la protección anti-intrusión.

Funciones comunes:

- Sistema Rolling Code. Frecuencia 433.92 MHz.
- Punto intermedio fácilmente programable.
- Memorización de nuevos emisores a través del original.
- Posibilidad de reconocer un nuevo emisor principal, en caso de pérdida o deterioro del original, a través del motor.
- Posibilidad de conexión a un pulsador unipolar.

English:

The radio motor JE50RAM-SHUTTER (eRS4) has been designed to be installed with roller shutters in aluminium or pvc window shutter box and traditional roller shutter system.

Specific roller shutter functions:

- Automatic limit switch set up.
- Automatic obstacle detection, in its downwards movement.
- Automatic anomalous resistance detection, in its upwards movement by freezing or slats displacement.
- Roller shutter locked on its down limit switch, increasing its security anti-intrusion (using rigid springs).

Common functions:

- Rolling Code system. Frequency 433.92 MHz.
- Easily set up limit switch midpoint.
- Programming new transmitters, through the original one.
- Faculty to learn a new main transmitter, in case of loss or damage to original, through the motor.
- Possibility to connect to unipolar pushbutton.



Características principales - Main characteristics - Caratteristiche principali - Caratteristiche principali - Schlüsseleigenschaften - Características principais

Product Code	JE50/10RAM-SHUTTER	JE50/20RAM-SHUTTER	JE50/30RAM-SHUTTER	JE50/40RAM-SHUTTER	JE50/50RAM-SHUTTER
Torque (Nm)	10	20	30	40	50
Speed (Rpm)	17	17	17	13	13
Tube diameter motor (Ø mm)	45	45	45	45	45
Max. load in Ø 50 mm tube	27 - p.28-31 (+ info)	47 - p.28-31 (+ info)	72,5 - p.28-31 (+ info)	95 - p.28-31 (+ info)	110 - p.28-31 (+ info)
Working time (Minutes)	4	4	4	4	4
Limit switch capacity (Turns)	0 ~ ∞	0 ~ ∞	0 ~ ∞	0 ~ ∞	0 ~ ∞
Protection rating (IP)	IP44	IP44	IP44	IP44	IP44
Voltage ~ Frequency (V ~ Hz)	230 ~ 50	230 ~ 50	230 ~ 50	230 ~ 50	230 ~ 50
Absorption (A)	0,68	0,84	0,95	0,95	1,06
Consumption (W)	155	203	226	226	244
Cable length (M)	2,50	2,50	2,50	2,50	2,50
Motor weight (Kg)	2,35	2,45	2,50	2,50	2,65
Motor length (mm)	570	570	600	600	600
Package quantity (pcs)	10	10	10	10	10
Certification - Warranty	6	6	6	6	6